


Fitting instructions for solid ceiling grid recessed lighting down lighter fire canopy.



1 Remove canopy and fittings from packaging, check contents and unfold canopy.



2 Locate aperture in ceiling surface

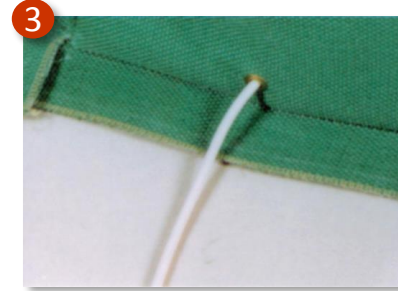

3 Align cable entry with power cable and thread cable through.




4 Place canopy above aperture, with flaps turned outwards flat against the ceiling surface and overlapped at the corners.



5 Secure canopy to ceiling with stainless steel staples of a minimum 12mm length and wire size 20 gauge (0.5 x 1.25mm) at 80mm centres along the four flaps.



6 Install light fitting as recommended by manufacturer.

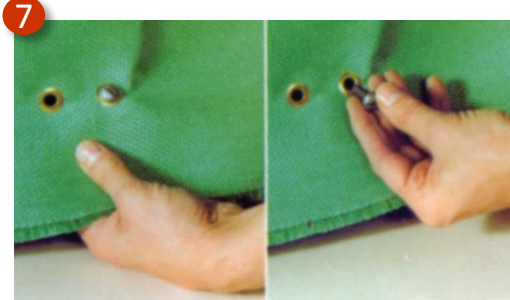

7 All recessed lighting canopies have single and dual cable access. For dual cable access remove sealing bolt as shown.